




IMR 420, Bayard-Alpert, DN 40 CF-F

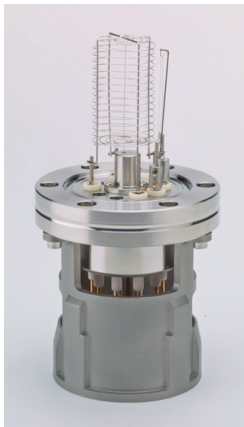


Similar Image

IMR 420, Bayard-Alpert, DN 40 CF-F

- X-ray limit: $< 1 \cdot 10^{-11}$ hPa
- Bakeout temperature: 400 °C
- Variable emission current
- Operation only with hot cathode controller IMG 400

Dimensions

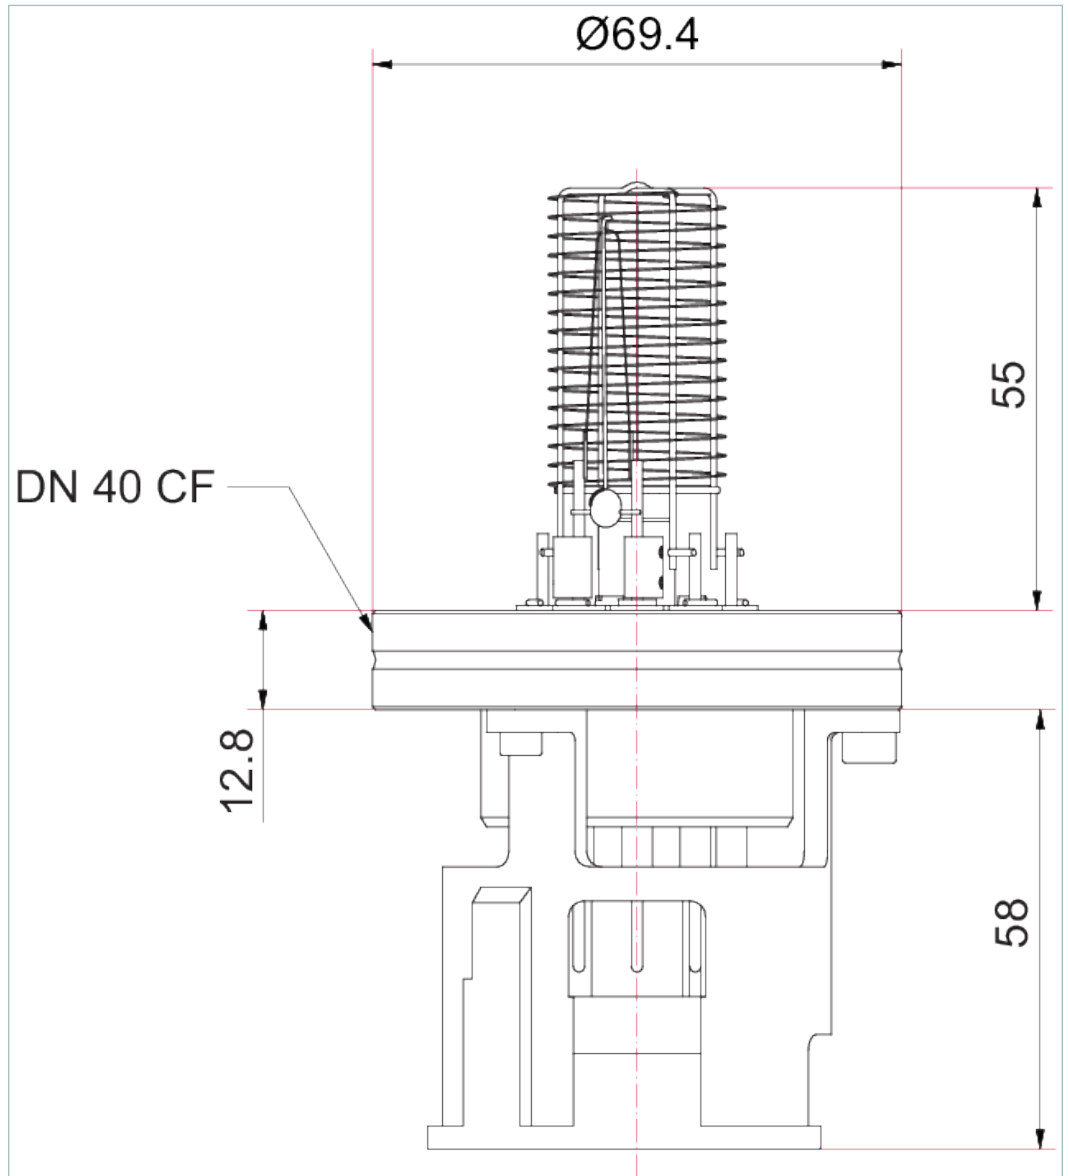

Technical Data

IMR 420, Bayard-Alpert, DN 40 CF-F

Anode	Pt/Ir 90/10 und Mo/Pt sheath wire
Bakeout temperature without cable	≤ 400 °C ≤ 752 °F ≤ 673 K
Collector	Tungsten
Feedthrough	NiFe
Filament	Iridium coated with Y_2O_3
Flange, Material	Stainless steel
Insulator	Al_2O_3 ceramic, glazed

Technical Data	IMR 420, Bayard-Alpert, DN 40 CF-F
Measurement range	$2 \cdot 10^{-11} - 1 \cdot 10^{-2}$ hPa
Method of measurement	Bayard-Alpert
Nominal diameter	DN 40 CF-F

Order number	
IMR 420	PT T07 359 900

Accessories	
Cables Measurement cables	
Measurement Cable IMG 400 for IMR 420 and IMR 430, 3 m	PT 548 342 -T
Measurement Cable IMG 400 for IMR 420 and IMR 430, 5 m	PT 548 343 -T
Measurement Cable IMG 400 for IMR 420 and IMR 430, 10 m	PT 548 344 -T
Measurement Cable IMG 400 for IMR 420 and IMR 430, 50 m	PT 548 348 -T

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

PFEIFFER  **VACUUM**