


TPG 262, controller for 2 gauges



- For operation of two ActiveLine transmitters
- Simple to operate
- Easy readable display

Dimensions (in mm)

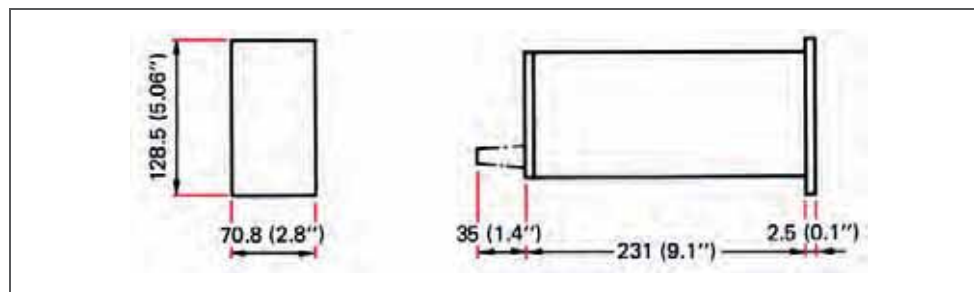

Technical data	TPG 262 controller for 2 transmitter
Connections for transmitter	2
Display rate	10 1/s
Automatic changeover: Pirani-cold cathode	$6 \cdot 10^{-3}$ hPa
Error signal: Working contact, potential-free	1 piece
Filter time constant	1.2/0.4/0.02 s
Weight	1.1 kg
Measurement range max.	55000 hPa
Measurement range min.	$5 \cdot 10^{-11}$ hPa
Measurement rate	50 1/s
Mains requirement: frequency (range)	50/60 Hz
Mains requirement: power consumption	45 VA
Mains requirement: voltage (range)	90-250 V
Set point: Voltage max.	60 V DC
Set point: Current max.	1 A
Set point: Changeover contact, potential-free	4 pieces
Interface	RS-232-C
Protection category	IP 30
Safety	EN61010-1 / EN 50081-1 / EN50082-2 / IEC1010
Signal output: Measuring value, analog	0-10 V
Temperature: Operating	5-50 °C
Temperature: Storage	-20-+65 °C

Order number	
TPG 262, controller for 2 gauges	PT G28 280

Accessories	
Sensor cable, 1 m	PT 448 248 -T
Sensor cable, 3 m	PT 448 250 -T
Sensor cable, 6 m	PT 448 251 -T
Sensor cable, 10 m	PT 448 252 -T
Sensor cable, 15 m	PT 448 253 -T
Sensor cable, 20 m	PT 448 254 -T
Sensor cable, 25 m	PT 448 255 -T
Sensor cable, 30 m	PT 448 256 -T
Sensor cable, 35 m	PT 448 257 -T
Sensor cable, 40 m	PT 448 258 -T
Sensor cable, 45 m	PT 448 259 -T
Sensor cable, 50 m	PT 448 260 -T